


Vibration damped version // Aluminium gold-coloured anodised

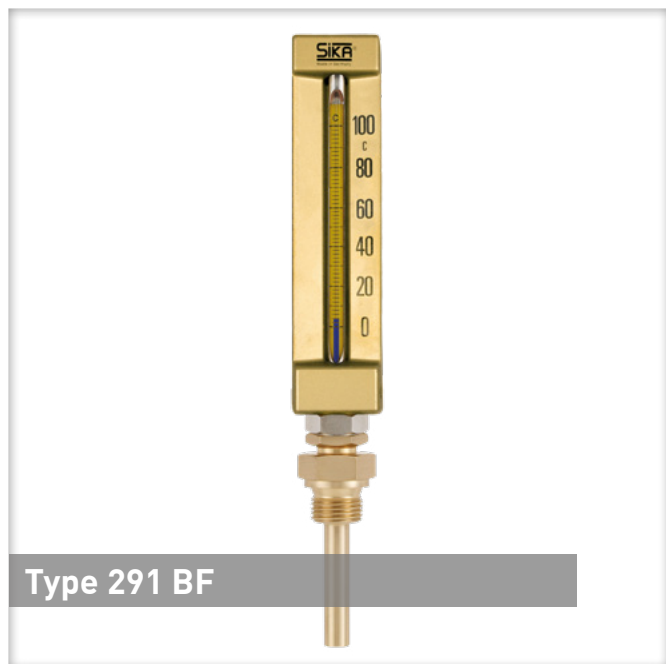

Type 291 BF

Your advantages

Type	BF
	<ul style="list-style-type: none"> • For use in applications subject to strong vibrations, e.g. on large diesel engines • Glass insert glued in nickel-plated steel tube spring-mounted in the casing → Highest possible resistance to separation of thermometric column • Lifetime warranty (except glass breakage and improper installation) • Completely without electrical power supply • Scale ranges 0...100 °C and 0...200 °C • Available as type 271 BF and 291 BF

Order code								
Version								
Gold-coloured, straight, nominal size 150 mm		291						
Gold-coloured, straight, nominal size 200 mm		271						
Immersion tube type BF								
Insert spring-mounted		BF						
Display ranges								
0...100 °C			10					
0...200 °C			20					
Scale								
Celsius °C				1				
Thermometric filling liquid								
Blue filling					1			
Immersion tube installation lengths (l ₁)								
63 mm						063		
100 mm							100	
160 mm								160
Process connection								
G½							2	
Immersion tube material								
Brass								1
Example order number		291	BF	10	1	1	063	2 1

Further options on request.

Accessories	Article number
Measuring point designation Laser-inscribed stainless steel plate with fixing wire for easy attachment to measuring points <ul style="list-style-type: none"> → Scope of delivery: Designation plate inscribed according to specification and enclosed fixing wire (sealing wire) → Fastening: Wire (included in delivery), alternatively sealing, cable ties or similar (not included in delivery) → Materials: Plate stainless steel 1.4571, wire stainless steel → Dimensions: Plate 55 x 10 x 0.8 mm, wire length 180 mm → Inscription: one-sided, single-line, max. 11 characters, character height 5 mm, designation width max. 40 mm, letters, numbers, symbols, barcodes, QR codes → Transmission of designations: digital list, file formats Excel, Word or CSV 	ONSITETAG

