


Rotatable angle version // Aluminium gold-coloured anodised

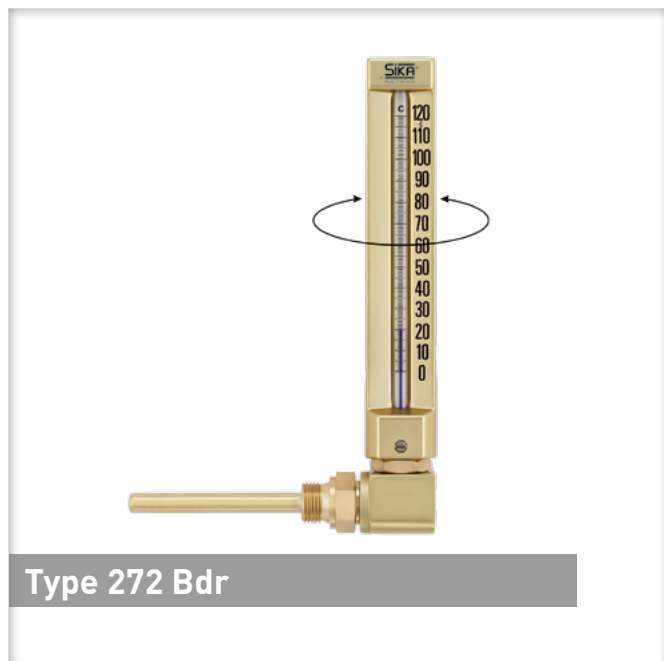

Your advantages

Type	Bdr
	<ul style="list-style-type: none"> • Thermometer casing axially rotatable by 360° → adjustable for reading in any viewing direction • No aging - no moving parts and no mechanical wear • Lifetime warranty (except glass breakage and improper installation) • Completely without electrical power supply • Available as type 272, 292 and 175

Order code									
Version									
Gold-coloured, angle 90°, nominal size 110 mm	175								
Gold-coloured, angle 90°, nominal size 150 mm	292								
Gold-coloured, angle 90°, nominal size 200 mm	272								
Immersion tube type B									
Angle version rotatable	6								
Display ranges									
0...100 °C		10							
0...120 °C		12							
0...160 °C		16							
0...200 °C		20							
Scale									
Celsius °C				1					
Thermometric filling liquid									
Blue filling					1				
Immersion tube installation lengths (l ₁)									
63 mm						063			
100 mm						100			
160 mm						160			
250 mm						250			
Process connection									
G½							2		
G¾							3		
Immersion tube materials									
Brass								1	
Stainless steel								3	
Example order number		175	6	10	1	1	063	2	1

Further options on request.

Accessories	Article number
<p>Measuring point designation Laser-inscribed stainless steel plate with fixing wire for easy attachment to measuring points</p> <ul style="list-style-type: none"> → Scope of delivery: Designation plate inscribed according to specification and enclosed fixing wire (sealing wire) → Fastening: Wire (included in delivery), alternatively sealing, cable ties or similar (not included in delivery) → Materials: Plate stainless steel 1.4571, wire stainless steel → Dimensions: Plate 55 x 10 x 0.8 mm, wire length 180 mm → Inscription: one-sided, single-line, max. 11 characters, character height 5 mm, designation width max. 40 mm, letters, numbers, symbols, barcodes, QR codes → Transmission of designations: digital list, file formats Excel, Word or CSV 	ONSITETAG

